

Rec'd PCT/PTO 29 DEC 2004

PCT/GB2004/004842



10/519946

INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport

South Wales
NP10 8QQ 14 DEC 2004
WIPO PCT

PRIORITY DOCUMENT


SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

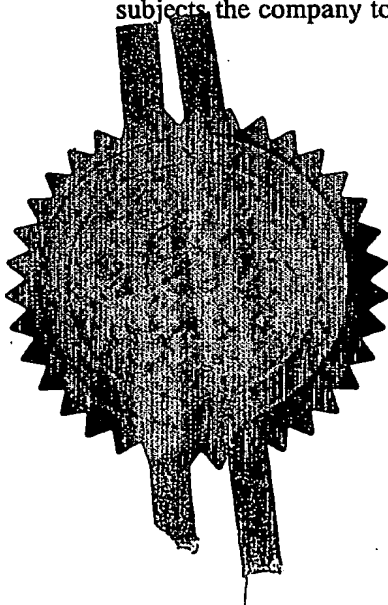

Signed

Dated 24 November 2004

BEST AVAILABLE COPY

Patents Form 1/77

Patents Act 1977
(Rule 16)

20 NOV 2003

The
Patent
Office20NOV03 E853800-1 002887
P01/7700 0.00-0327037.8

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

THE PATENT OFFICE
JP
20 NOV 2003
RECEIVED BY FAX

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference

XA1875

2. Patent application number

(The Patent Office will fill in this part)

0327037.8

3. Full name, address and postcode of the or of each applicant (underline all surnames)

MBDA UK Limited

Six Hills Way, Stevenage
Hertfordshire, SG1 2DA

Patents ADP number (if you know it)

08339350001 ✓

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

SIGNAL PROCESSING SYSTEM

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom
to which all correspondence should be sent
(including the postcode)BAE SYSTEMS plc
Group IP Department
Lancaster House, P.O. Box 87
Farnborough Aerospace Centre
Farnborough, Hampshire, GU14 6YU

Patents ADP number (if you know it)

07914674002 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77


0086600:20-NOV-03:05:56

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	05
Claim(s)	02
Abstract	01
Drawing(s)	01



10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

1


Request for substantive examination (Patents Form 10/77)

Any other documents
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature



Date

Malcolm Edis

20/11/2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Maria Burkes 01252 383487

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

- 1 -

DUPLICATE

SIGNAL PROCESSING SYSTEM

This invention relates to an electromagnetic signal processing system and more specifically, but not exclusively, to a system of processing an optical
5 signal.

WO02/29436 teaches that a laser-radar receiver should comprise an array of optical fibres which are connected to at least one radiation detector, each optical fibre having different physical characteristics which result in known delays in the transmission time of pulsed electromagnetic radiation. Such
10 delays are conveniently achieved by using optical fibres of differing lengths so that they operate as delay lines. Arrays of 3X3 optical fibres are taught, each optical fibre connected to single avalanche photo-diode (APD).

In our co-pending UK patent application number 0322564.6, we have taught that an electromagnetic signal processing system may comprise a
15 plurality of optical fibre arrays, each optical fibre array having a cluster of optical fibres with their one ends oriented to receive electromagnetic radiation and arrange to transmit electromagnetic radiation to an array output, the array outputs being connected to transmit electromagnetic radiation in sequence to a signal detector input. In this co-pending application we have also taught various
20 additional features for such signal processing systems.

According to the present invention a signal processing system has at least two processing channels, a plurality of optical fibres with their one ends oriented to receive electromagnetic radiation, and couplers interconnecting the other ends of the optical fibres such that electromagnetic radiation transmitted
25 by the optical fibres will be coupled together and then directed into each processing channel. In this manner the same optical signal arriving at an array of optical fibres can be split into different channels for processing.

At least one of the processing channels preferably includes a processing board with an output to a signal detector. At least one of the processing boards
30 may include electrical and/or optical signal processing components.

- 2 -

At least one of the processing channels is preferably arranged to transmit the electromagnetic radiation in sequence to a single detector input. This can be achieved as taught in our co-pending UK patent application 0322564.6. Preferably another processing channel may be arranged to transmit the
5 electromagnetic radiation in sequence to another signal detector input, and the two processing channels incorporate different optical delays to minimise any range/position ambiguity.

One of the processing channels may be arranged to transmit electromagnetic radiation in sequence to a signal detector unit, and another
10 processing channel arranged to transmit the electromagnetic radiation to a processing board configured to assess the range and depth of a target.

By providing at least two processing channels, it is possible for two processing channels to contain different signal detectors. This enables the electromagnetic radiation to be assessed with different sensitivities for different
15 tasks, for different wavelengths, and for other different physical characteristics.

By having at least two processing channels, the invention also enables one processing channel to feed signals into at least one of the other channels. This feature greatly enhances the processing of received electromagnetic radiation.

20 The invention will now be described, by way of example only, with reference to the accompanying drawings in which: -

Figure 1 is a diagram illustrating our current technique of connecting optical fibres to a detector,

Figure 2 is a diagram illustrating one embodiment of the present
25 invention, and

Figure 3 is a diagram illustrating a further embodiment of the present invention.

With reference to Figure 1, a signal processing system 10, comprises an optical fibre cluster or array 11 having nine optical fibres, one end of each fibre
30 being depicted by the small circles 40. The set of nine fibres is positively

- 3 -

located in predetermined relative positions in an array board 41 which, in use, would be mounted to face the direction from which an electromagnetic signal may be received. Although the array board 41 is shown as being rectangular with optical fibres 40 arranged equally-spaced in a 3x3 matrix, the array board
5 41 may be of any convenient shape and its cluster of optical fibres 40 may be any required number arranged in any suitable manner to receive electromagnetic radiation. The optical fibre array 41 is depicted in a simplified manner with only two optical fibres 42, 43 for the right-hand column being drawn. It should be understood that all nine optical fibres of the array board 41
10 have different lengths, as shown in Figure 1, so that there is an in-built time delay between the transmission by each optical fibre. The optical fibres 42, 43 are shown joined by a 2-in-to-1 coupler 44 to a single output 45. The other optical fibres 40 forming the array board 41 would similarly be connected to the output 45 by respective couplers 44.

15 An optical system 46 is used to direct incoming electromagnetic signals on to the ends of the optical fibres 40.

The present invention is illustrated by Figure 2 in which the same reference numerals have been used to indicate equivalent features. The primary difference is that the coupler 44 of Figure 1 has been replaced by a 2-
20 in-to-2 coupler 54 which couples the optical fibres 42 and 43 together, but then directs the combined signal into two separate processing channels defined by the output 45 and a second output 47. This configuration enables the processing channels 45, 47 to feed the electromagnetic radiation into different signal processors. One of the processing channels 45, 47 may be provided
25 with a processing board with an output to a signal detector, the processing board including electrical and/or optical signal processing components.

The other processing channel 47 or 45 can be arranged to transmit the electromagnetic radiation in sequence to a signal detector input as taught by our aforesaid co-pending UK patent application.

30 In Figure 3, two array boards 41 and 141 are provided with electromagnetic radiation through the same optical system 46. The optical

- 4 -

fibres 42 and 43 are connected by a 2-in-to-1 connector 44 to an optical fibre 50, whereas optical fibres 142 and 143 from array board 141 are connected by a 2-in-to-1 connector 144 to an optical fibre 150.

It will be noted that the optical fibre 50 is longer than the optical fibre 150
5 whereby any signal transmitted by optical fibre 50 to coupler 154 will be delayed relative to a signal through the shorter optical fibre 150. This cascading of the optical fibres 50 and 150 enables the respective signals to be differentiated by a signal detector.

However, the coupler 154 serves to split the combined signal into the two
10 processing channels 45 and 47 for separate processing in the same manner as has been described with reference to Figure 2.

Instead of using 2-in-to-2 couplers, N-in-to-M couplers may be used so that any number of inputs can be combined together and then split into any number of processing channels.

15 A primary advantage of the invention is that the same optical signal arriving at an array board 41, or 141, can be split into different processing channels.

In the real system there would be many other fibres feeding into the processing channels 45 and 47. Typically, multiple array boards 41 or 141
20 would be individually mounted to face a direction from which an electromagnetic signal might be received. They may face either in the same direction or may be oriented to receive electromagnetic radiation from different directions. Instead of being mounted in the array boards, the optical fibres 40 could be mounted directly through any convenient support structure.

25 In addition to directing the electromagnetic signal into two or more processing channels 45, 47, this approach also enables signals to be fed back from a stage in one channel to a stage in another channel, and vice versa, whereby detection of a signal characteristic in one processing channel can be used to affect the processing of the same signal in another channel. This
30 enables the formation of very complex processing architectures.

- 5 -

In one example, one of the processing channels could have a cascaded structure as taught in our aforesaid co-pending UK patent application, whilst another processing channel could include a processing board incorporating electrical and/or optical components to process signals, the processing board
5 being fed with all fibres from the array (not just from one cluster) into the signal detector. In this manner the detector would receive a series of pulses which would permit the range and depth of a target to be deduced. The depth of the target being the difference between the front and the back edges of the signal.

In another example, two processing channels could have cascaded
10 structures as taught in our aforesaid co-pending UK patent application, but with the channels using different time delays. This configuration enables issues, such as the "range/position ambiguity" to be minimised or eliminated.

In a further example, the processing channels could contain different detectors, for instance with different sensitivities for different tasks, different
15 wavelengths, and other differing parameters.

20

25

- 6 -

CLAIMS

1. A signal processing system having at least two processing channels, a plurality of optical fibres with their one ends oriented to receive electromagnetic radiation, and couplers interconnecting the other ends of the optical fibres such that electromagnetic radiation transmitted by the optical fibres will be coupled together and then directed into each processing channel.
2. A signal processing system, according to Claim 1, in which at least one of the processing channels includes a processing board with an output to a signal detector.
3. A signal processing system, according to Claim 2, in which at least one of the processing boards includes electrical and/or optical signal processing components.
4. A signal processing system, according to any preceding claim, in which at least one of the processing channels is arranged to transmit the electromagnetic radiation in sequence to a signal detector input.
5. A signal processing system, according to Claim 4, in which another processing channel is arranged to transmit the electronic radiation in sequence to another signal detector input, and the two processing channels incorporate different optical delays to minimise any range/position ambiguity.
6. A signal processing system, according to Claim 1, in which one of the processing channels is arranged to transmit electromagnetic radiation in sequence to a signal detector unit, and another processing channel is arranged to transmit the electromagnetic radiation to a processing board configured to assess the range and depth of a target.
7. A signal processing system, according to any preceding claim, in which two processing channels contain different signal detectors.

- 7 -

8. A signal processing system, as in any preceding claim in which at least one processing channel is arranged to feed signals into at least one other channel.

9. A signal processing system substantially as described herein with reference
5 to the accompanying drawings.

10

15

20

25

- 8 -

Abstract**Signal Processing System**

A signal processing system (10) has a plurality of optical fibres (40, 42, 43) with their one ends (40) mounted in an array board (41) to receive electromagnetic radiation. A coupler (54) interconnects the other ends of the optical fibres (42, 43) such that electromagnetic radiation is first coupled together and then directed into two or more processing channels (45, 47).

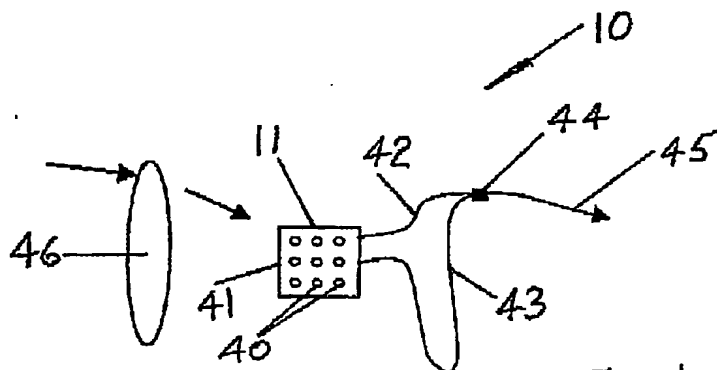


FIG. 1

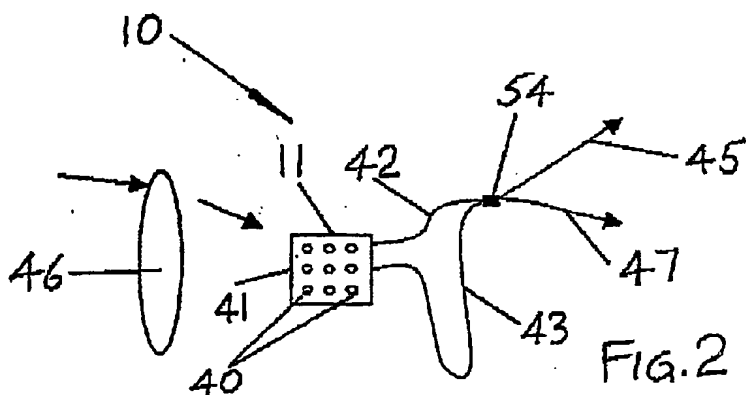


FIG. 2

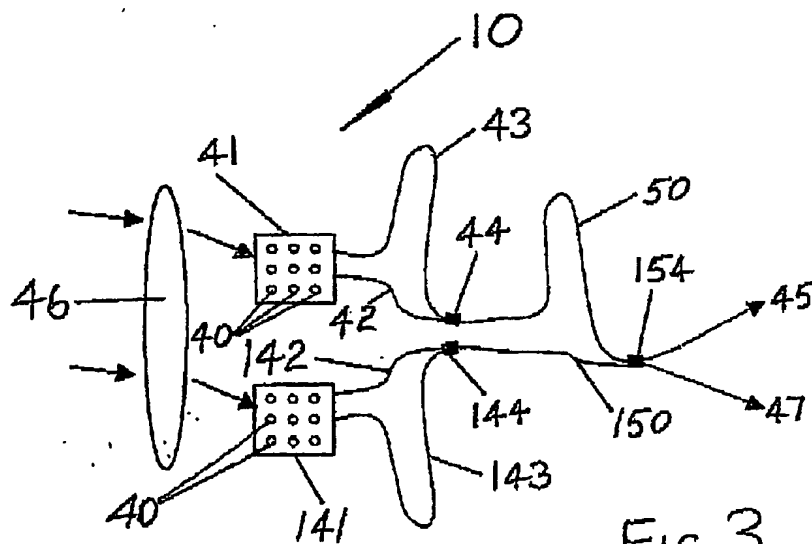


FIG. 3

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.